




**PALADIN**<sup>®</sup>  
MCMILLEN

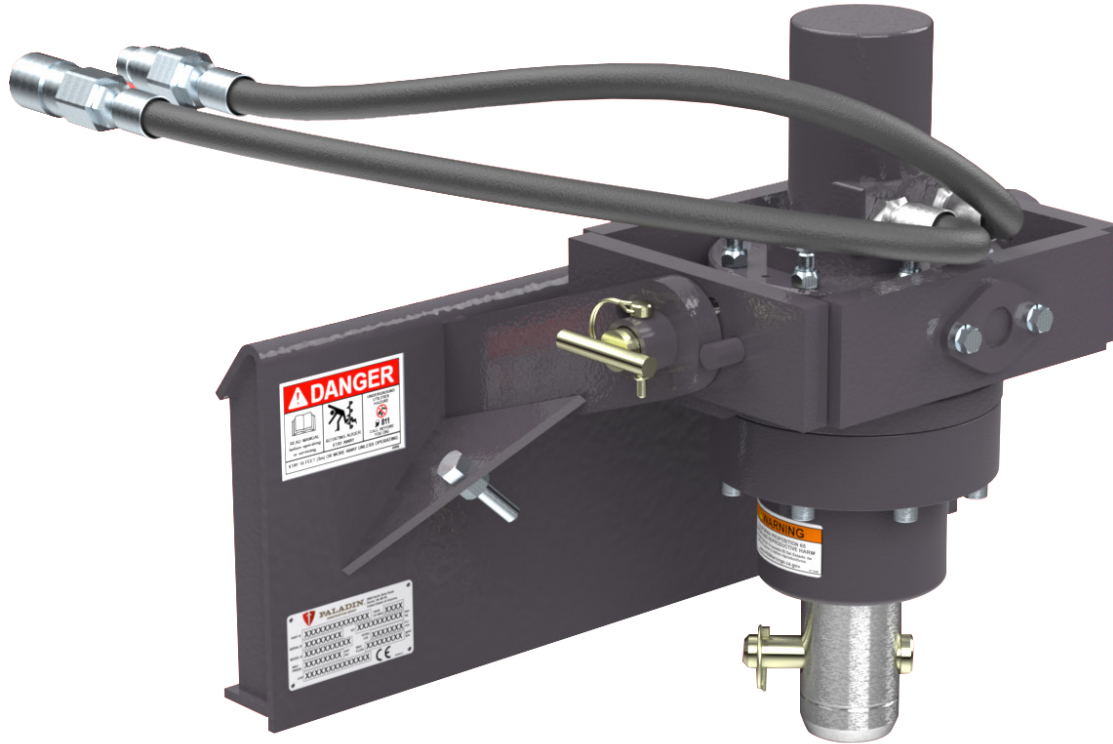

# X900/X1500 AUGER DRIVES

FOR COMPACT TOOL CARRIERS

Designed for the CTC (Compact Tool Carriers) mini skid steers, to bore holes from 4- to 36-inch diameters. Great for landscapers and contractors, allowing them to get into tight areas to get their holes bored.

# X900/X1500 AUGER DRIVES

FOR COMPACT TOOL CARRIERS

## FEATURES

- Two models available, X900 & X1500
- X900 provides speed, X1500 provides high torque
- 2-9/16" round shaft (X900 & X1500 models)
- 2" hex shaft (X1500 model only)
- Over 30 auger bits available to fit your job specifications

## SPECIFICATIONS

	X900		X1500				
	24452	24759	24453	24861	120276	24674	24760
<b>MAXIMUM AUGER DIAMETER</b>	15"	15"	30"	30"	30"	30"	30"
<b>MINIMUM HYDRAULIC FLOW</b>	8 GPM	8 GPM	8 GPM	8 GPM	8 GPM	8 GPM	8 GPM
<b>MAXIMUM HYDRAULIC FLOW</b>	16 GPM	16 GPM	16 GPM	16 GPM	16 GPM	16 GPM	16 GPM
<b>MAXIMUM CONTINUOUS OPERATING PSI</b>	3000 PSI	3000 PSI	3000 PSI	3000 PSI	3000 PSI	3000 PSI	3000 PSI
<b>OUTPUT SHAFT OPTIONS</b>	2-9/16" Rnd	2-9/16" Rnd	2-9/16" Rnd	2" Hex	2" Hex	2-9/16" Rnd	2-9/16" Rnd
<b>MOUNT</b>	CII	SSL	CII	CII	Bobcat	Bobcat	SSL

X900 OUTPUT SPEED	
FLOW	SPEED
8 GPM / 30 LPM	64 RPM
12 GPM / 45 LPM	95 RPM
16 GPM / 60 LPM	127 RPM

X1500 OUTPUT SPEED	
FLOW	SPEED
8 GPM / 30 LPM	32 RPM
12 GPM / 45 LPM	48 RPM
16 GPM / 60 LPM	64 RPM

X900 OUTPUT TORQUE	
PRESSURE	TORQUE
2000 PSI / 141 kg/cm <sup>2</sup>	770 LB•FT / 1044 N•M
2500 PSI / 176 kg/cm <sup>2</sup>	963 LB•FT / 1305 N•M
3000 PSI / 211 kg/cm <sup>2</sup>	1155 LB•FT / 1566 N•M

X1500 OUTPUT TORQUE	
PRESSURE	TORQUE
2000 PSI / 141 kg/cm <sup>2</sup>	1541 LB•FT / 2089 N•M
2500 PSI / 176 kg/cm <sup>2</sup>	1926 LB•FT / 2611 N•M
3000 PSI / 211 kg/cm <sup>2</sup>	2311 LB•FT / 3133 N•M